
FFB600


6 LEVEL FLAME 600MM INSERT



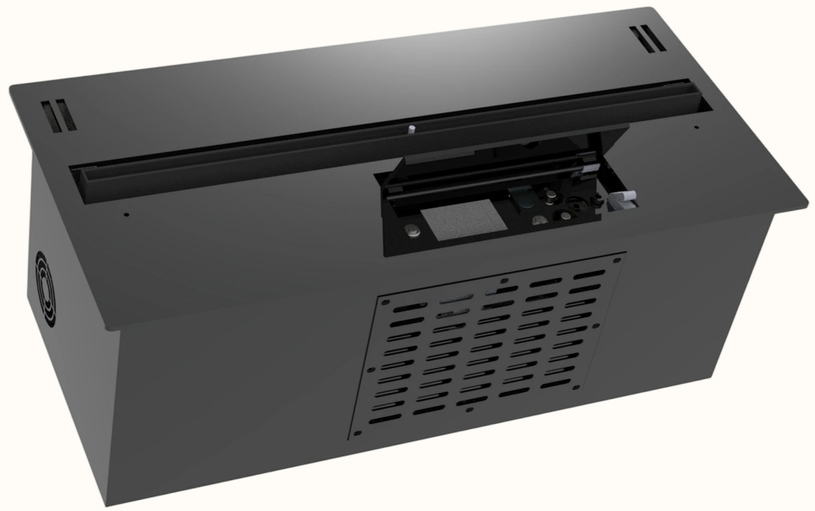


Flame height regulation	6 stages
Tank capacity	4.3L
Maximum operation time	6.5 hours
With Glass	YES
Fuel	95% Bioethanol
Power supply	220-240V, 50 Hz
Max Output	3.75KW
Finish	Black Electroplate Finish
Top Plate	4mm Thickness 304 Stainless Steel

In: mm
[inch]

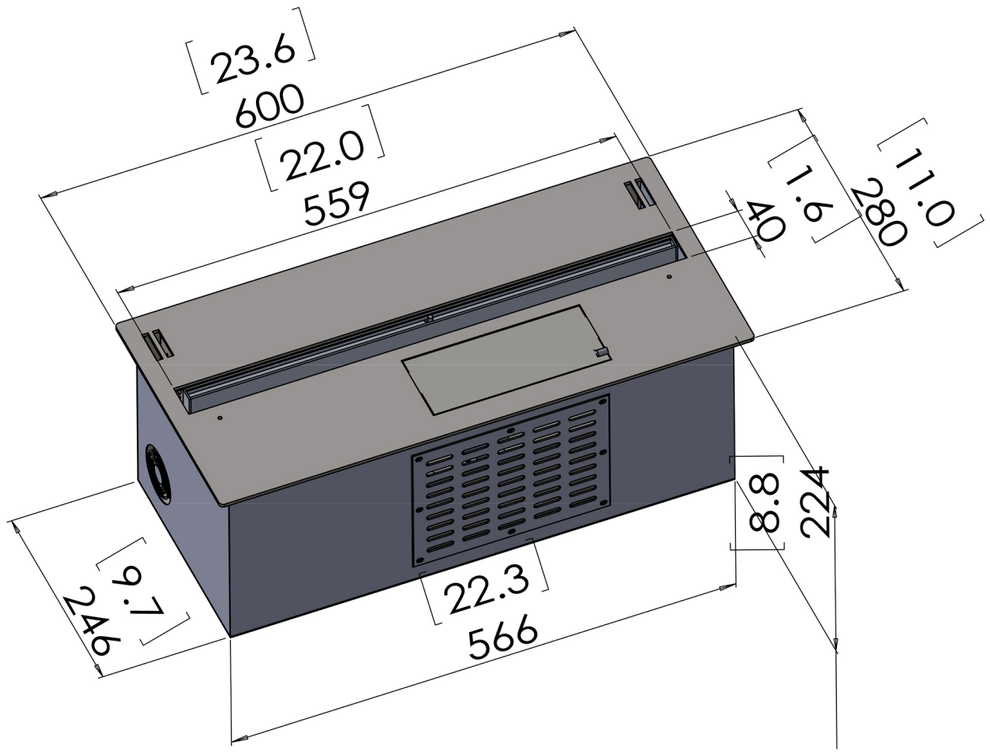

Housing Size:

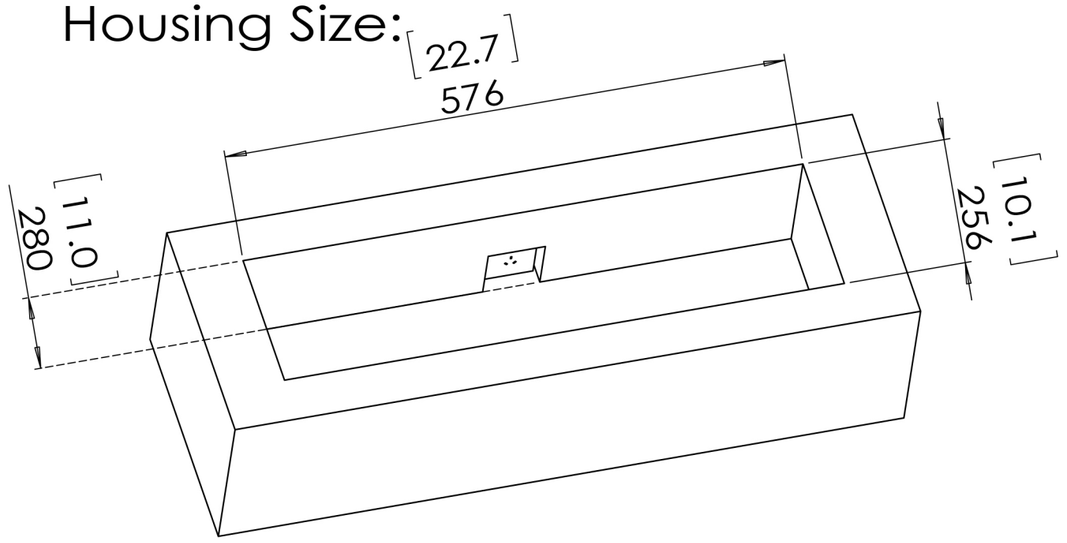


FFB700

6 LEVEL FLAME 700MM INSERT




Flame height regulation	6 stages
Tank capacity	5.1L
Maximum operation time	6.8 hours
With Glass	YES
Fuel	95% Bioethanol
Power supply	220-240V, 50 Hz
Max Output	4KW
Finish	Black Electroplate Finish
Top Plate	4mm Thickness 304 Stainless Steel

In: mm
[inch]

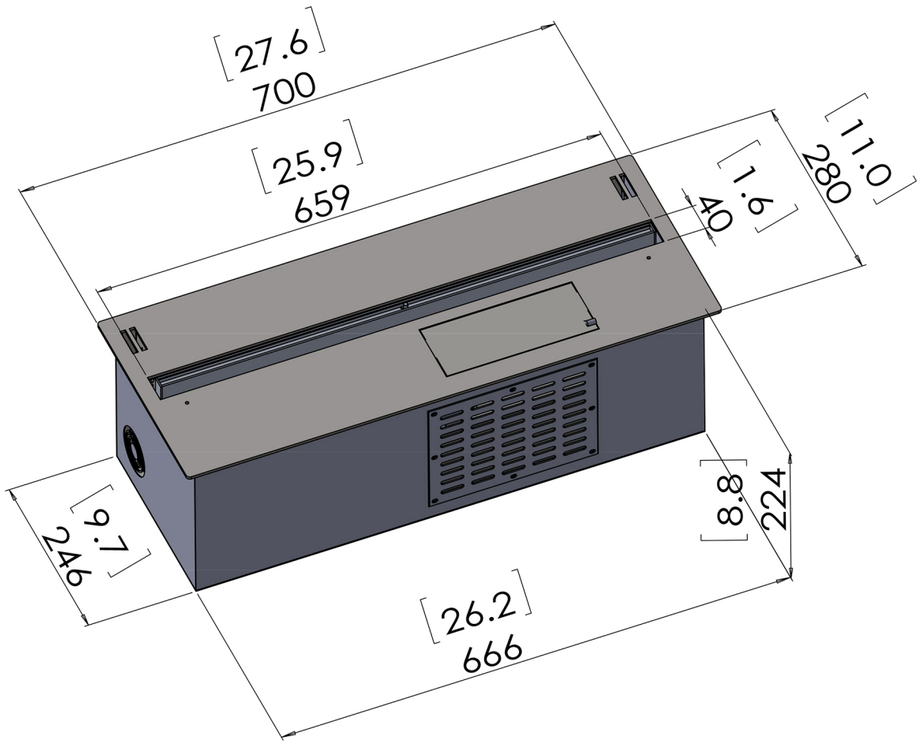

Housing Size:

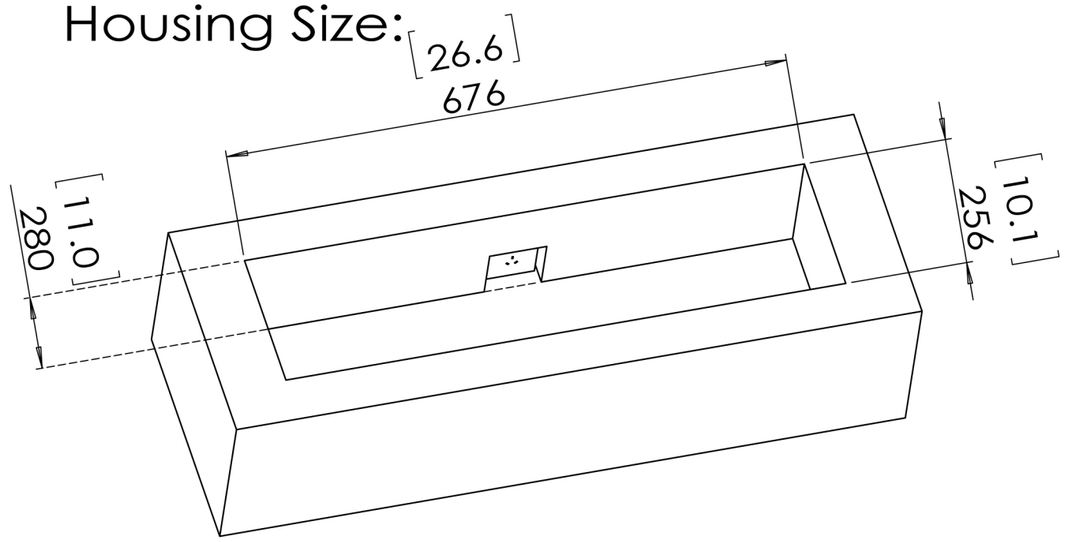


FFB800

6 LEVEL FLAME 800MM INSERT




Flame height regulation	6 stages
Tank capacity	6L
Maximum operation time	7.1 hours
With Glass	YES
Fuel	95% Bioethanol
Power supply	220-240V, 50 Hz
Max Output	4.5KW
Finish	Black Electroplate Finish
Top Plate	4mm Thickness 304 Stainless Steel

In: mm
[inch]

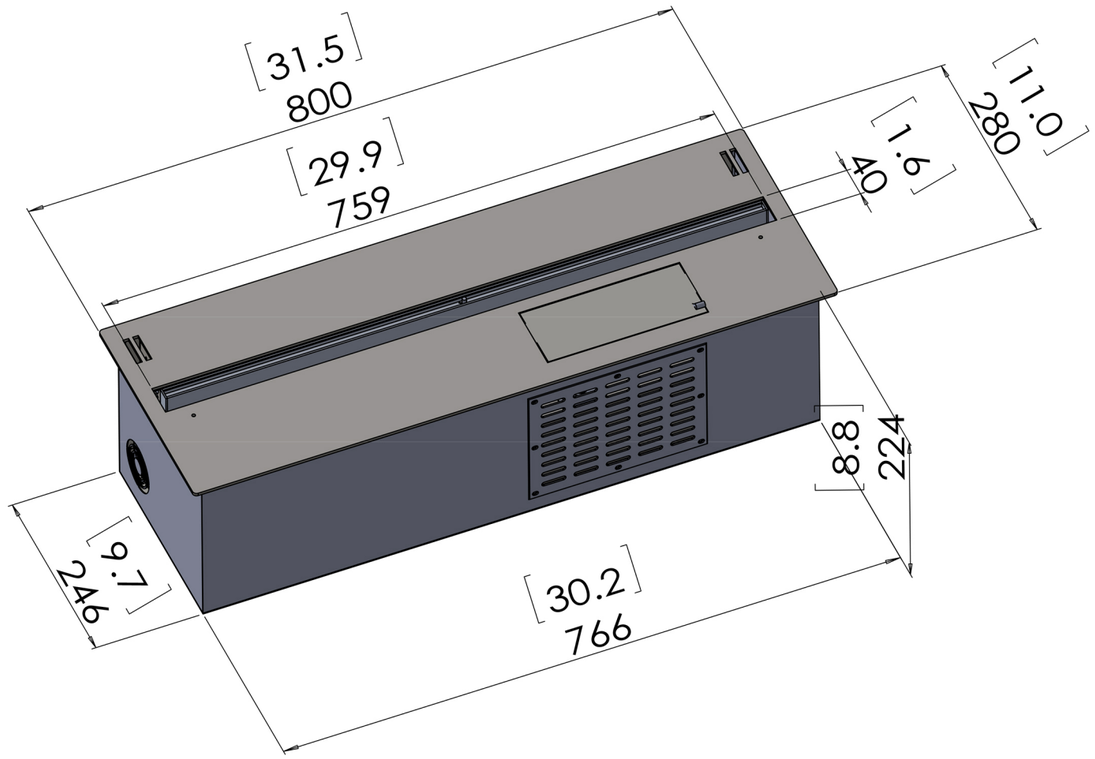

Housing Size:

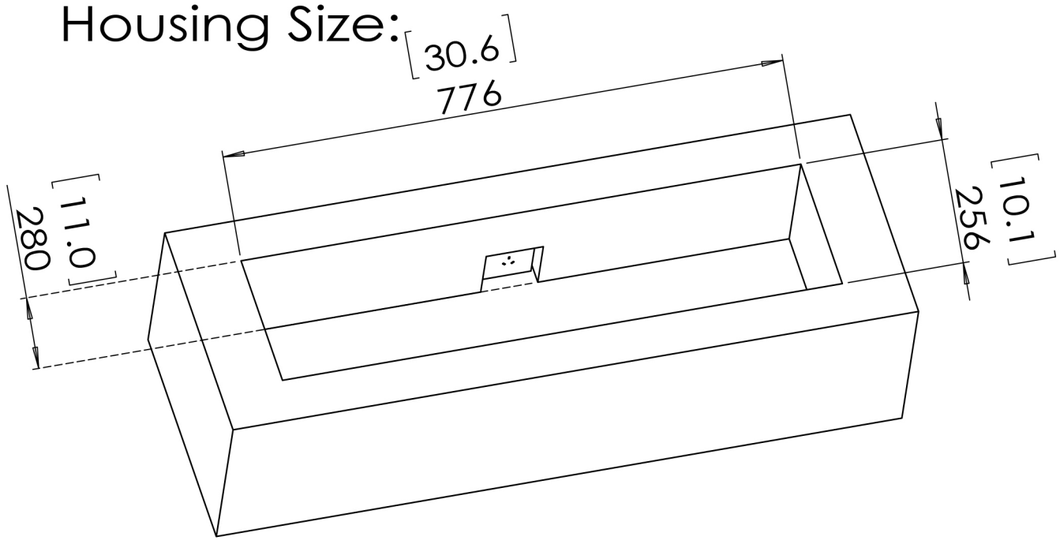


FFB900

6 LEVEL FLAME 900MM INSERT




Flame height regulation	6 stages
Tank capacity	6.8L
Maximum operation time	7.3 hours
With Glass	YES
Fuel	95% Bioethanol
Power supply	220-240V, 50 Hz
Max Output	5KW
Finish	Black Electroplate Finish
Top Plate	4mm Thickness 304 Stainless Steel

In: mm
[inch]

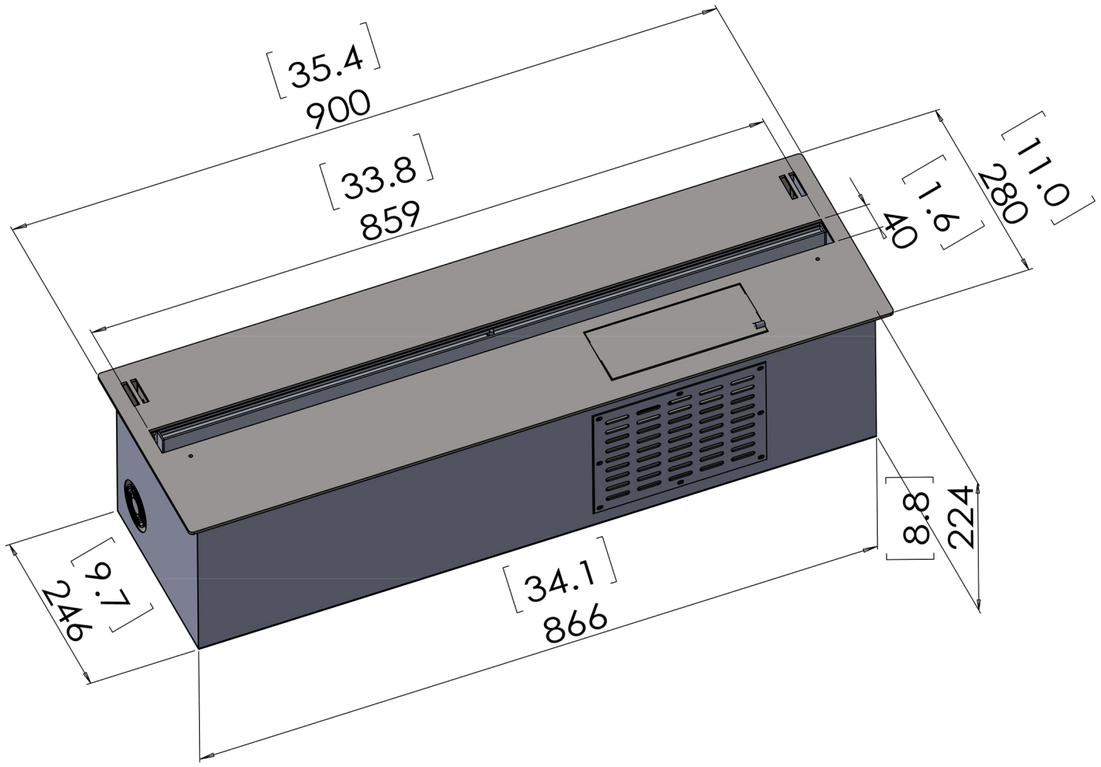

Housing Size:

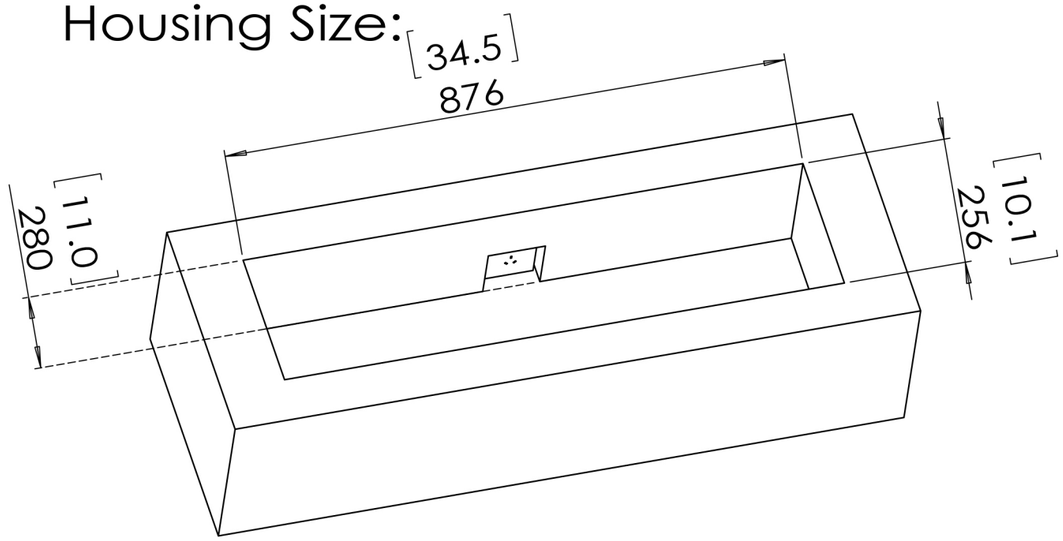


FFB 1000

6 LEVEL FLAME 1000MM INSERT




Flame height regulation	6 stages
Tank capacity	7.6L
Maximum operation time	7.6 hours
With Glass	YES
Fuel	95% Bioethanol
Power supply	220-240V, 50 Hz
Max Output	5.5KW
Finish	Black Electroplate Finish
Top Plate	4mm Thickness 304 Stainless Steel

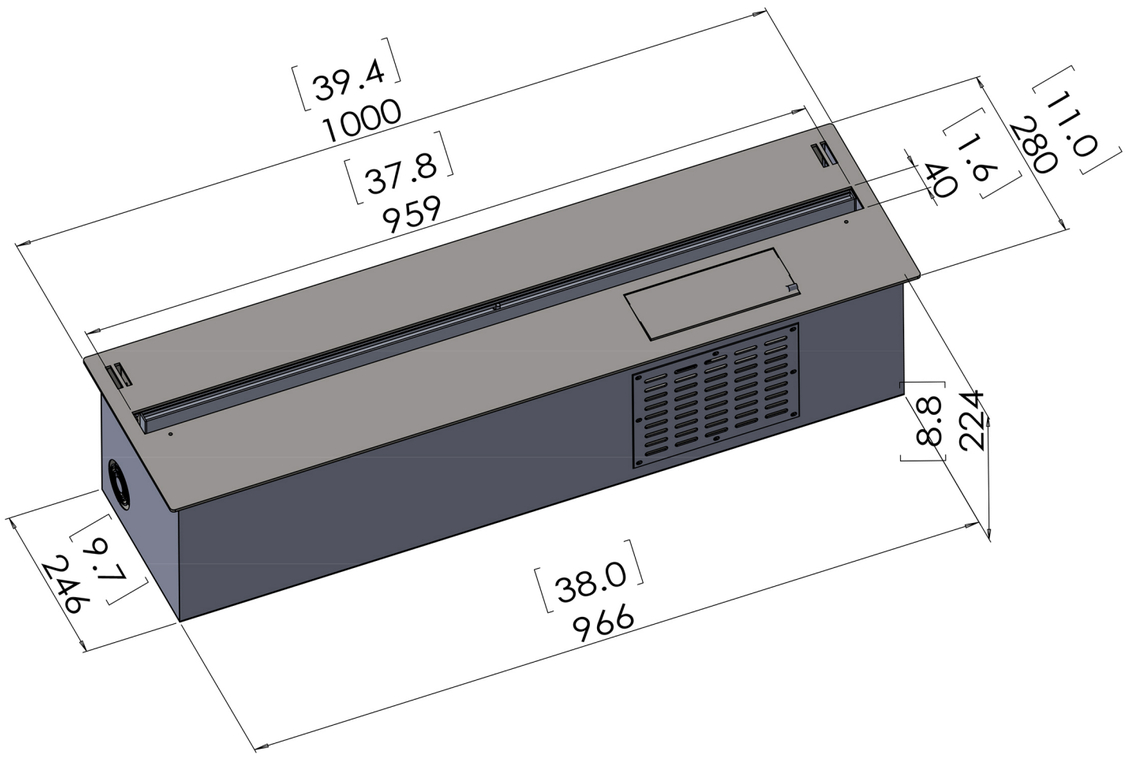

In: mm
[inch]

Housing Size:

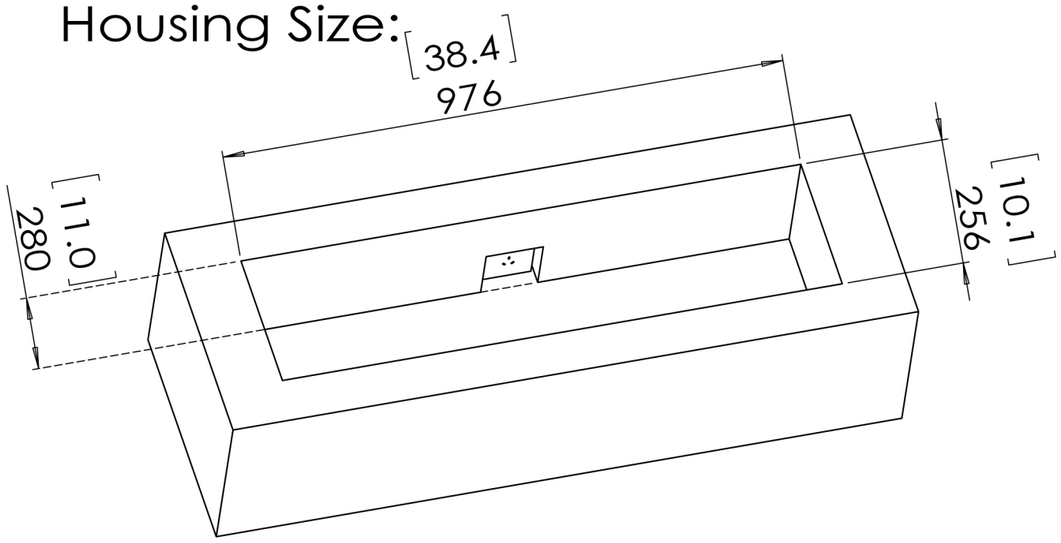


FFB 1100

6 LEVEL FLAME 1100MM INSERT




Flame height regulation	6 stages
Tank capacity	8.8L
Maximum operation time	8.4 hours
With Glass	YES
Fuel	95% Bioethanol
Power supply	220-240V, 50 Hz
Max Output	5.9KW
Finish	Black Electroplate Finish
Top Plate	4mm Thickness 304 Stainless Steel

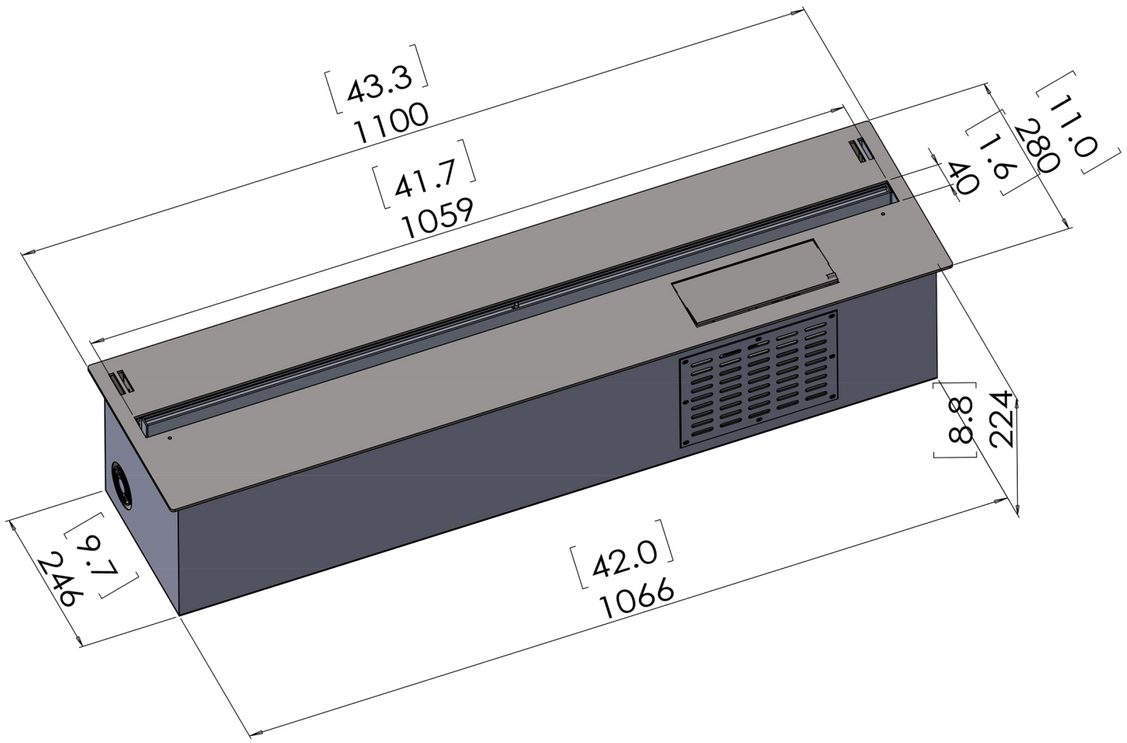


In: mm
[inch]

Housing Size:

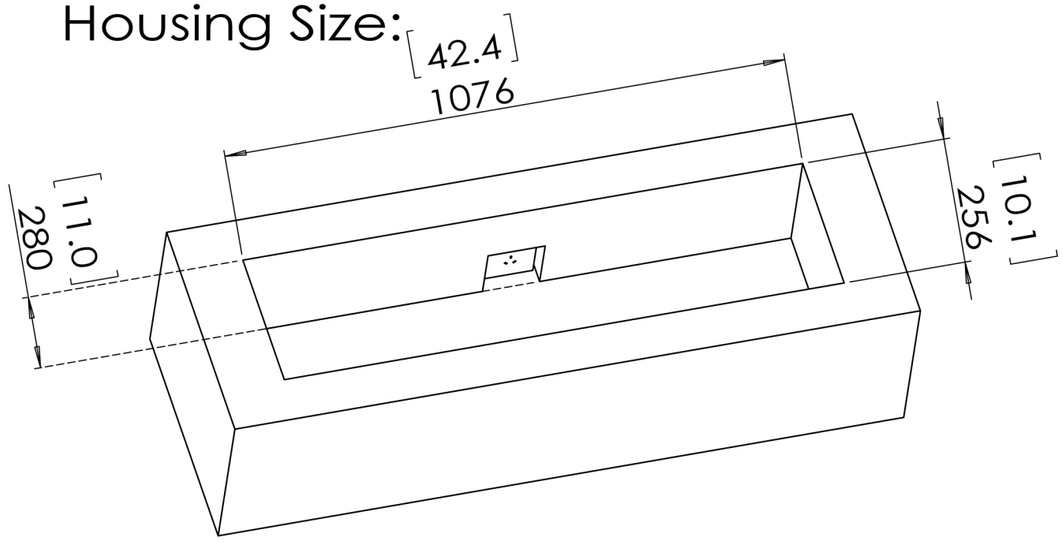


FFB 1200

6 LEVEL FLAME 1200MM INSERT

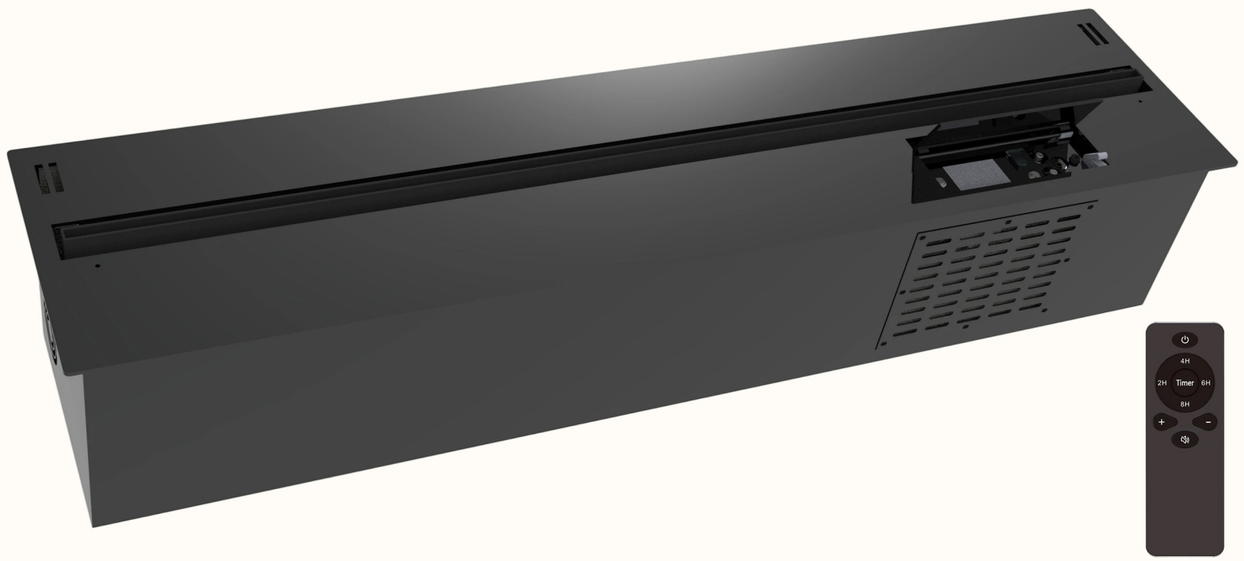

Flame height regulation	6 stages
Tank capacity	9.6L
Maximum operation time	8.7 hours
With Glass	YES
Fuel	95% Bioethanol
Power supply	220-240V, 50 Hz
Max Output	6.5KW
Finish	Black Electroplate Finish
Top Plate	4mm Thickness 304 Stainless Steel

In: mm
[inch]

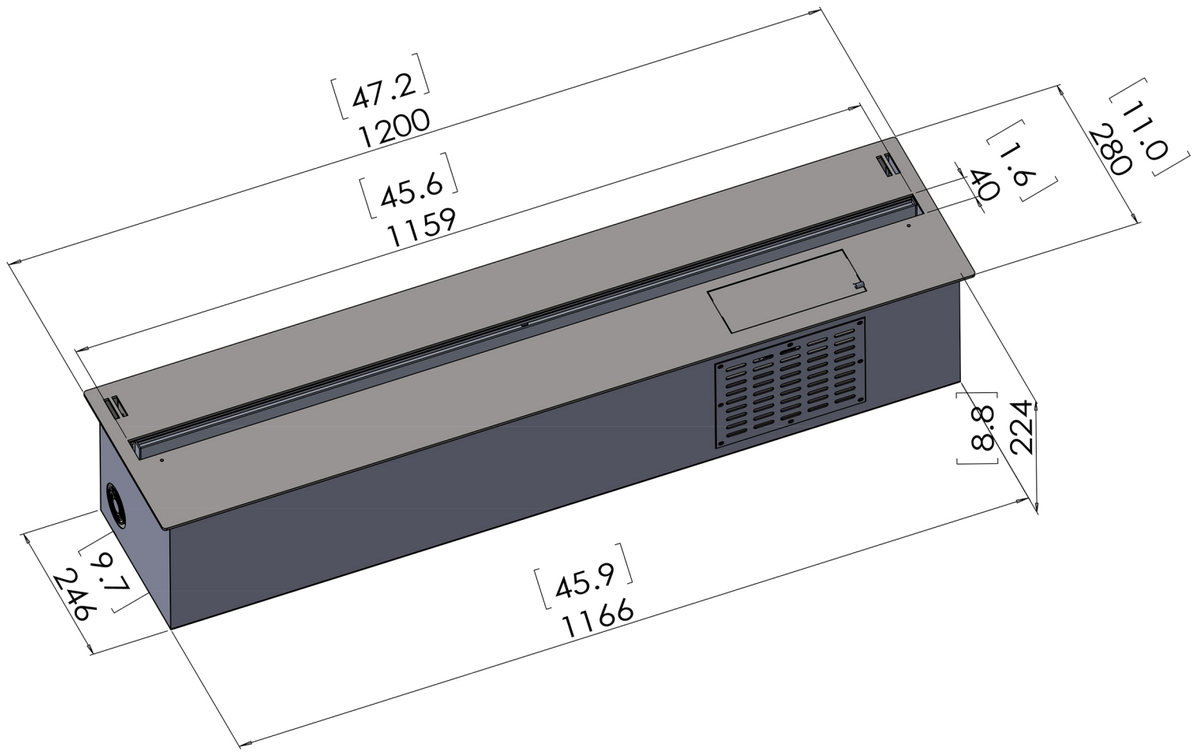

Housing Size:

